

# Specification

**BTHQ12864AVE-STF-06-LED02YG-COG**

**Version May 2005**

**DOCUMENT REVISION HISTORY**

DOCUMENT REVISION FROM TO	DATE	DESCRIPTION	CHANGED BY	CHECKED BY
A	2005.05.05	<p>First Release. Based on</p> <p>a.) Test Specification: VL-TS-COG-BTHQ12864-05 Rev. A, 2005.05.05.</p> <p>b.) VL-QUA-012A REV. R, 2004.03.20.</p> <p>According to VL-QUA-012A, LCD size is small because Unit Per Laminate=14 which is more than 6pcs/Laminate.</p>	CHEN HUI JUAN	VIVIAN LUO

## CONTENTS

	<u>Page No.</u>
1. GENERAL DESCRIPTION	4
2. MECHANICAL SPECIFICATIONS	4
3. INTERFACE SIGNALS	7
4. ABSOLUTE MAXIMUM RATINGS	9
4.1 ELECTRICAL MAXIMUM RATINGS – FOR IC ONLY	9
4.2 ENVIRONMENTAL CONDITIONS	9
5. ELECTRICAL SPECIFICATIONS	10
5.1 TYPICAL ELECTRICAL CHARACTERISTICS	10
5.2 TIMING SPECIFICATIONS	11
5.3 INSTRUCTION SET	14
6. REFERENCE APPLICATION CIRCUIT (8080) EXAMPLE	15

**Specification  
of  
LCD Module Type  
Model No.: COG-BTHQ12864-05**

**1. General Description**

- 128 x 64 dots STN Positive Yellow Transflective Dot Matrix LCD Module.
- Viewing Angle: 6 o'clock direction.
- Driving scheme: 1/65 duty, 1/7 bias.
- 'Epson' SED1565D0B (COG) Dot Matrix LCD Driver.
- 8080 Series MPU interface (default).
- 6800 Series MPU interface (Optional).
- FPC connection.
- Yellow green LED02 backlight.

**2. Mechanical Specifications**

The mechanical detail is shown in Fig. 1 and summarized in Table 1 below.

Table 1

Parameter	Specifications	Unit
Outline dimensions	89.7(W) x 49.8(H) x 6.0(D)(Exclude FPC & gate) 89.7(W) x 149.8(H) x 6.0(D)(Include FPC. Exclude gate) 89.7(W) x 150.0(H) x 6.0(D)(Include FPC and gate)	mm
View area	66.8 MIN.(W) x 35.5 MIN. (H)	mm
Active area	63.985(W) x 31.985(H)	mm
Display format	128 (W) x 64(H)	dots
Dot size	0.485(W) x 0.485(H)	mm
Dot spacing	0.015(W) x 0.015(H)	mm
Dot pitch	0.500(W) x 0.500(H)	mm
Weight	56	gram

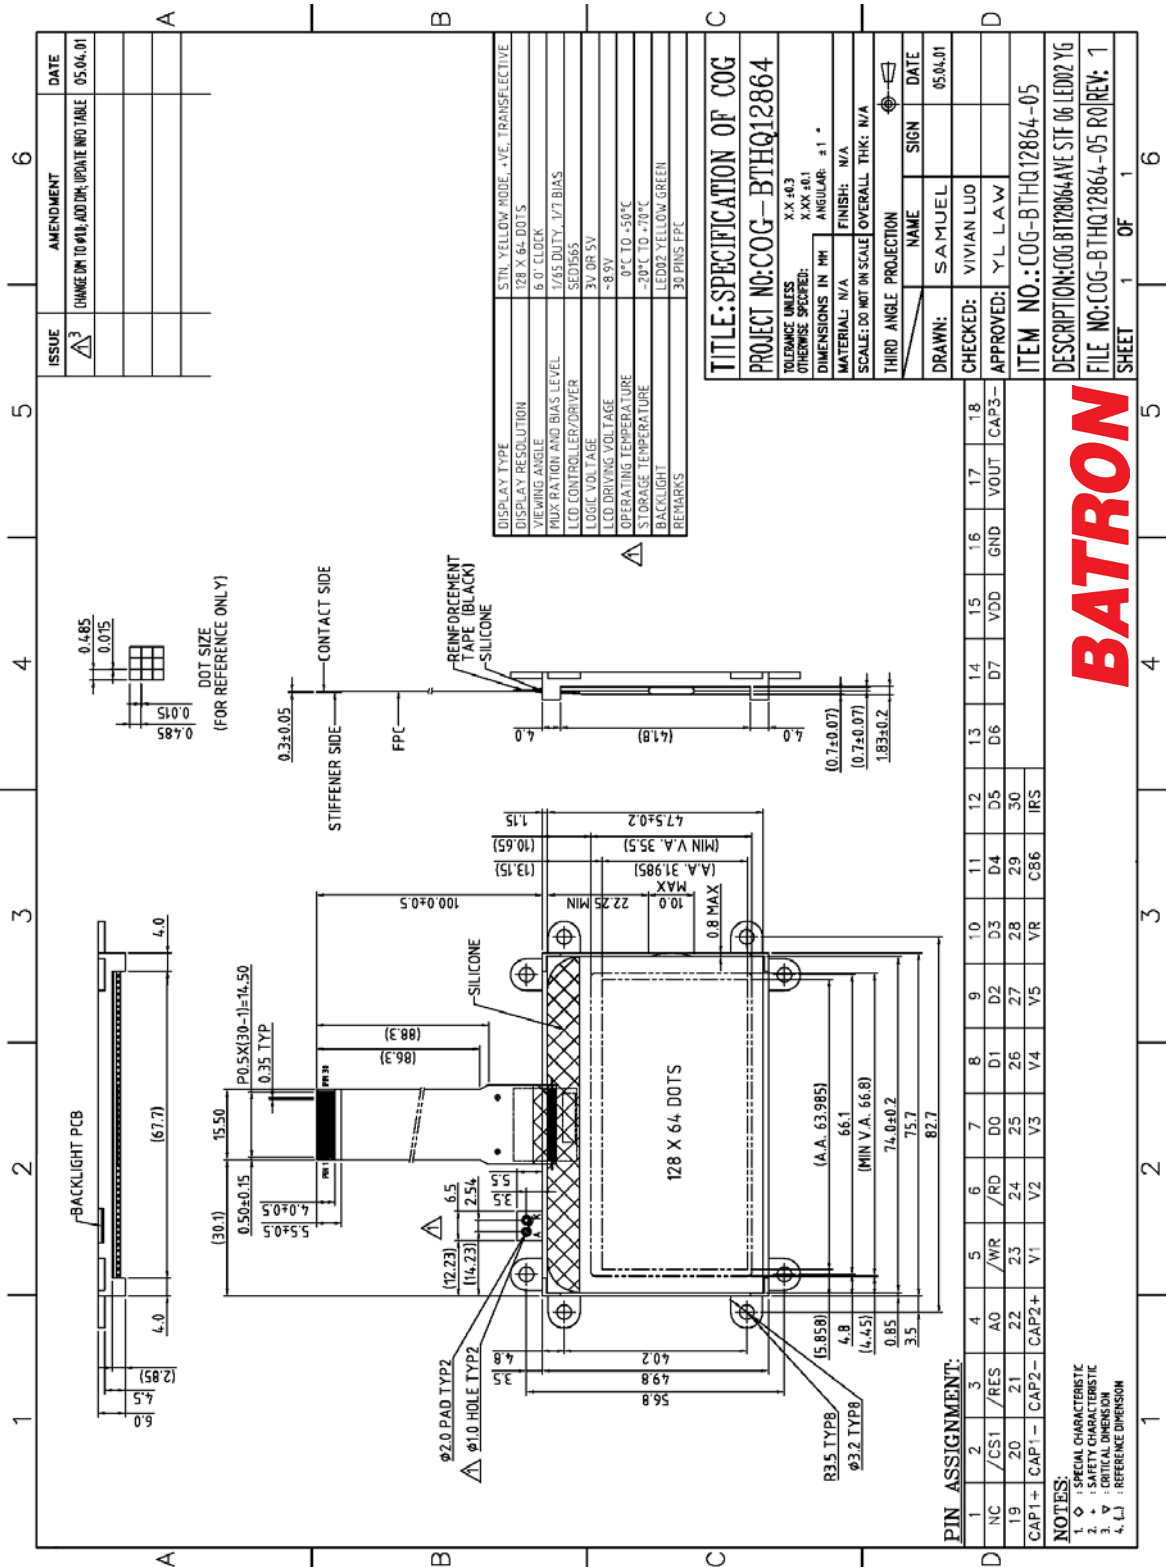


Figure 1: Module Specification

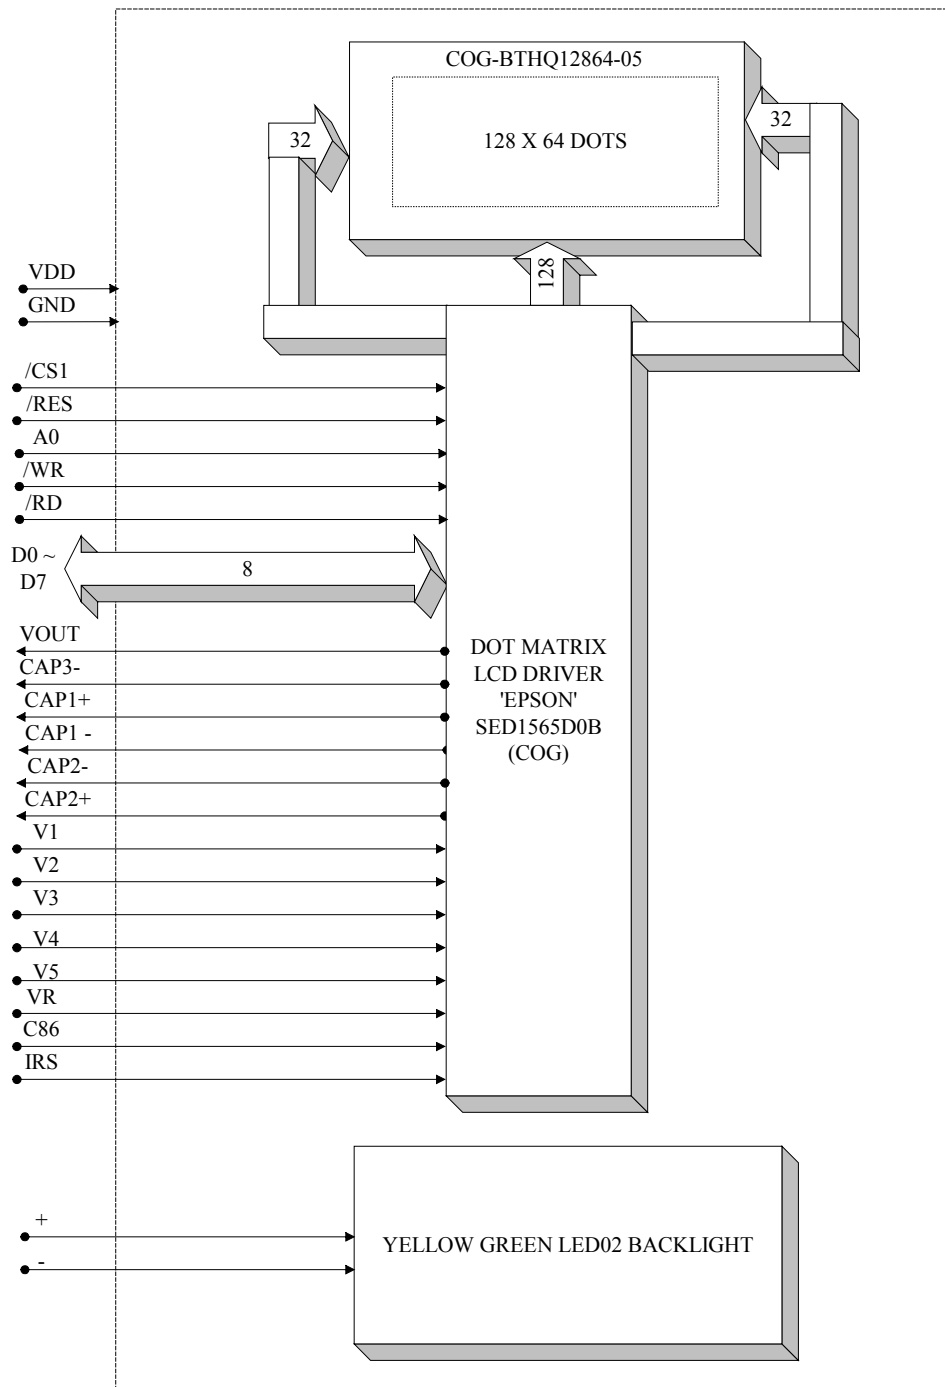


Figure 2: Block Diagram

### 3. Interface signals

Table 2 (a)

Pin No.	Symbol	Description
1	NC	No connection.
2	/CS1	This is the chip select signal. When /CS1 = "L", then the chip select become active, and data/command I/O is enabled.
3	/RES	When /RES is set to "L," the settings are initialized. The reset operation is performed by the /RES signal level.
4	A0	This is connected to the least significant bit of the normal MPU address bus, and it determines whether the data bits are data or a command. A0 = "H": Indicates that D0 to D7 are display data. A0 = "L": Indicates that D0 to D7 are control data.
5	/WR	When connected to an 8080 MPU, this is active LOW. This terminal connects to the 8080 MPU /WR signal. The signals on the data bus are latched at the rising edge of the /WR signal.
6	/RD	When connected to an 8080 MPU, this is active LOW. This pin is connected to the /RD signal of the 8080 MPU, and the SED1565 series data bus is in an output status when this signal is "L".
7	D0	This is an 8-bit bi-directional data bus that connects to an 8-bit or 16-bit 8 standard MPU data bus.
8	D1	
9	D2	
10	D3	
11	D4	
12	D5	
13	D6	
14	D7	
15	VDD	Power supply. Shared with the MPU power supply terminal VCC.
16	GND	Connection with ground.
17	VOUT	DC/DC voltage converter. Connect a capacitor between this terminal and GND.
18	CAP3-	DC/DC voltage converter. Connect a capacitor between this terminal and the CAP1+ terminal.
19	CAP1+	DC/DC voltage converter. Connect a capacitor between this terminal and the CAP1- terminal.
20	CAP1-	DC/DC voltage converter. Connect a capacitor between this terminal and the CAP1+ terminal.
21	CAP2-	DC/DC voltage converter. Connect a capacitor between this terminal and the CAP2+ terminal.
22	CAP2+	DC/DC voltage converter. Connect a capacitor between this terminal and the CAP2- terminal.

Table 2 (b)

Pin No.	Symbol	Description
23~27	V1,V2, V3,V4, V5	<p>This is a multi-level power supply for the liquid crystal drive. The voltage applied is determined by the liquid crystal cell, and is changed through the use of a resistive voltage divider or through changing the impedance using an op. amp. Voltage levels are determined based on VDD, and must maintain the relative magnitudes shown below.</p> $VDD (= V0) \geq V1 \geq V2 \geq V3 \geq V4 \geq V5$ <p>Master operation: When the power supply turns ON, the internal power supply circuits produce the V1 to V4 voltages shown below. The voltage settings are selected using the LCD bias set command.</p> <p>For 1/7 bias: <math>V1=(1/7) \times V5</math>, <math>V2=(2/7) \times V5</math>, <math>V3=(5/7) \times V5</math>, <math>V4=(6/7) \times V5</math>.</p>
28	VR	<p>Output voltage regulator terminal. Provides the voltage between VDD and V5 through a resistive voltage divider.</p> <p>These are only enabled when the V5 voltage regulator internal resistors are not used (IRS = "L").</p> <p>These cannot be used when the V5 voltage regulator internal resistors are used (IRS = "H").</p>
29	C86	<p>This is the MPU interface switch terminal.</p> <p>C86 = "H": 6800 Series MPU interface.</p> <p>C86 = "L": 8080 MPU interface.</p>
30	IRS	<p>This terminal selects the resistors for the V5 voltage level adjustment.</p> <p>IRS = "H": Use the internal resistors</p> <p>IRS = "L": Do not use the internal resistors. The V5 voltage level is regulated by an external resistive voltage divider attached to the VR terminal.</p> <p>This pin is enabled only when the master operation mode is selected.</p> <p>It is fixed to either "H" or "L" when the slave operation mode is selected.</p>
	+	Anode of backlight.
	-	Cathode of backlight.




## 4. Absolute Maximum Ratings

### 4.1 Electrical Maximum Ratings – for IC Only

Table 3

Parameter	Symbol	Min.	Max.	Unit
Power Supply voltage (Logic)	VDD-GND =VDD-VSS	-0.3	+7.0	V
Power supply voltage (VDD standard)	GND(=VSS2)	-7.0	+0.3	V
	With Triple set-up	-6.0	+0.3	V
	With Quad step-up	-4.5	+0.3	V
Power Supply voltage(V5,VOUT) (VDD standard)	V5,VOUT	-18.0	+0.3	V
Power Supply voltage(V1~V4) (VDD standard)	V1,V2,V3,V4	V5	+0.3	V
Input voltage	Vin	-0.3	VDD+0.3	V

- Note:
- 1.) The module may be destroyed if they are used beyond the absolute maximum ratings.
  - 2.) Insure that the voltage levels of V1, V2, V3, and V4 are always such that  $VDD \geq V1 \geq V2 \geq V3 \geq V4 \geq V5$ .
  - 3.) The VSS2, V1 to V5 and VOUT are relative to VDD=0V reference.

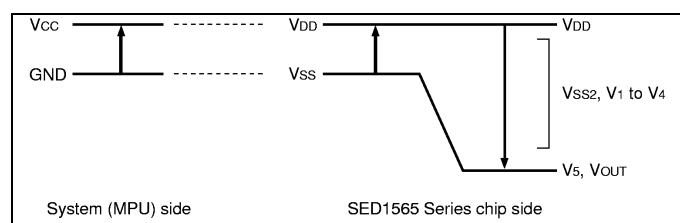

### 4.2 Environmental Conditions

Table 4

Item	Operating Temperature (Topr)		Storage Temperature (Tstg)		Remark
	Min.	Max.	Min.	Max.	
Ambient Temperature	0°C	+50°C	-20°C	+70°C	Dry
Humidity	95% max. RH for Ta ≤ 40°C < 95% RH for Ta > 40°C				No condensation
Vibration (IEC 68-2-6) cells must be mounted on a suitable connector	Frequency: 10 ~ 55 Hz Amplitude: 0.75 mm Duration: 20 cycles in each direction.				3 directions
Shock (IEC 68-2-27) Half-sine pulse shape	Pulse duration: 11 ms Peak acceleration: 981 m/s <sup>2</sup> = 100 g Number of shocks: 3 shocks in 3 mutually perpendicular axes.				3 directions

## 5. Electrical Specifications

### 5.1 Typical Electrical Characteristics

At Ta = 25 °C, VDD = 5V±5%, GND =0V.

Table 5

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Supply voltage (Logic)	VDD-GND		4.75	5.0	5.25	V
Supply voltage (LCD)	VLCD =VDD-V5	VDD=5.0V, Ta=0°C Note (1)	8.65	8.87	9.1	V
		VDD=5.0V, Ta=25°C Note (1)	8.5	8.75	9.0	V
		VDD=5.0V, Ta=50°C Note (1)	8.43	8.65	8.87	V
Low-level input signal voltage	V <sub>ILC</sub>		GND	-	0.2xVDD	V
High-level input signal voltage	V <sub>IHC</sub>		0.8xVDD	-	VDD	V
Supply Current (Logic & LCD)	IDD	VDD = 5V, Character mode	-	0.5	0.75	mA
		VDD = 5V, Checker board mode	-	1.0	1.5	mA
Supply voltage of yellow-green LED02 backlight	VLED	Forward current =60mA  Number of LED dies =2x6=12	4.5	4.75	4.85	V
Wavelength of Yellow-Green LED02 backlight	λ		570	572	576	nm

Note (1): There is tolerance in optimum LCD driving voltage during production and it will be within the specified range.

## 5.2 Timing Specifications

### Reset Timing

At  $T_a = 0\text{ }^{\circ}\text{C}$  to  $+50\text{ }^{\circ}\text{C}$ ,  $V_{DD} = +5.0\text{V} \pm 5\%$ ,  $GND = 0\text{V}$ .

Table 6

Item	Signal	Symbol	Condition	Rating			Units
				Min	Typ	Max	
Reset time		$t_R$		—	—	0.5	$\mu\text{s}$
Reset "L" pulse width	RES	$t_{RW}$		0.5	—	—	$\mu\text{s}$

Note: All timing is specified with 20% and 80% of VDD as the standard.

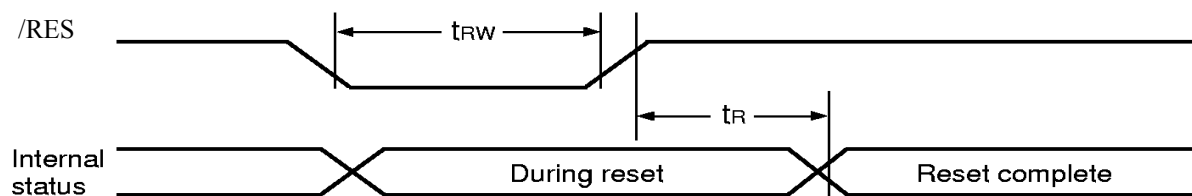


Figure 3:Reset Timing

## System Bus Read/Write Characteristics (8080 Series MPU)

At  $T_a = 0\text{ }^{\circ}\text{C}$  to  $+50\text{ }^{\circ}\text{C}$ ,  $V_{DD} = +5.0\text{V} \pm 5\%$ ,  $GND = 0\text{V}$ .

Table 7

Item	Signal	Symbol	Condition	Rating		Units
				Min	Max	
Address hold time	A0	$t_{AH8}$		0	—	ns
Address setup time	A0	$t_{AW8}$		0	—	ns
System cycle time	A0	$t_{CYC8}$		166	—	ns
Control L pulse width ( $\overline{WR}$ )	$\overline{WR}$	$t_{CCLW}$		30	—	ns
Control L pulse width ( $\overline{RD}$ )	$\overline{RD}$	$t_{CCLR}$		70	—	ns
Control H pulse width ( $\overline{WR}$ )	$\overline{WR}$	$t_{CCHW}$		30	—	ns
Control H pulse width ( $\overline{RD}$ )	$\overline{RD}$	$t_{CCHR}$		30	—	ns
Data setup time	D0 to D7	$t_{DS8}$		30	—	ns
Address hold time		$t_{DH8}$		10	—	ns
$\overline{RD}$ access time		$t_{ACC8}$	CL = 100 pF	—	70	ns
Output disable time		$t_{OH8}$		5	50	ns

- \*1 The input signal rise time and fall time ( $t_r, t_f$ ) is specified at 15 ns or less. When the system cycle time is extremely fast,  $(t_r + t_f) \leq (t_{CYC8} - t_{CCLW} - t_{CCHW})$  for  $(t_r + t_f) \leq (t_{CYC8} - t_{CCLR} - t_{CCHR})$  are specified.
- \*2 All timing is specified using 20% and 80% of  $V_{DD}$  as the reference.
- \*3  $t_{CCLW}$  and  $t_{CCLR}$  are specified as the overlap between  $\overline{CS1}$  being "L" ( $CS2 = \text{"H"}$ ) and  $\overline{WR}$  and  $\overline{RD}$  being at the "L" level.

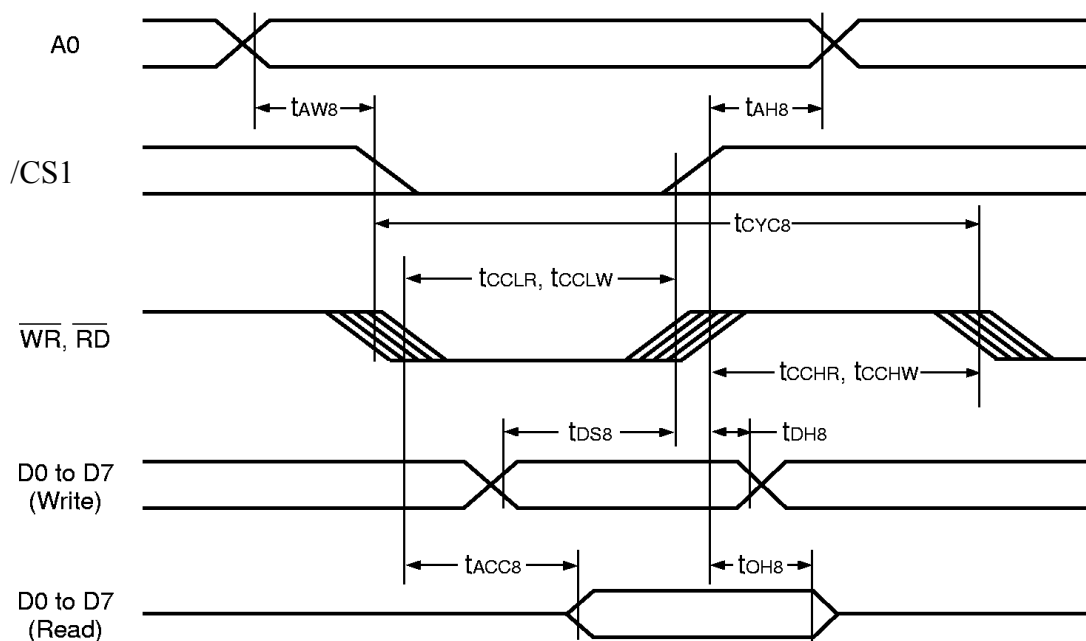


Figure 4: MPU bus read / write timing diagram (80 family MPU)

## System Bus Read/Write Characteristics (6800 Series MPU)

At  $T_a = 0\text{ }^{\circ}\text{C}$  to  $+50\text{ }^{\circ}\text{C}$ ,  $V_{DD} = +5.0\text{V} \pm 5\%$ ,  $V_{SS} = 0\text{V}$ .

Table 8

Item	Signal	Symbol	Condition	Rating		Units
				Min	Max	
Address hold time	A0	$t_{AH6}$		0	—	ns
Address setup time	A0	$t_{AW6}$		0	—	ns
System cycle time	A0	$t_{CYC6}$		166	—	ns
Data setup time	D0 to D7	$t_{DS6}$		30	—	ns
Data hold time		$t_{DH6}$		10	—	ns
Access time		$t_{ACC6}$	CL = 100 pF	—	70	ns
Output disable time		$t_{OH6}$		10	50	ns
Enable H pulse time	Read	E	$t_{EWHR}$	70	—	ns
	Write		$t_{EWHW}$	30	—	ns
Enable L pulse time	Read	E	$t_{EWLR}$	30	—	ns
	Write		$t_{EWLW}$	30	—	ns

- \*1 The input signal rise time and fall time ( $t_r$ ,  $t_f$ ) is specified at 15 ns or less. When the system cycle time is extremely fast,  $(t_r + t_f) \leq (t_{CYC6} - t_{EWLW} - t_{EWHW})$  for  $(t_r + t_f) \leq (t_{CYC6} - t_{EWLR} - t_{EWHR})$  are specified.
- \*2 All timing is specified using 20% and 80% of  $V_{DD}$  as the reference.
- \*3  $t_{EWLW}$  and  $t_{EWLR}$  are specified as the overlap between  $\overline{CS1}$  being "L" ( $CS2 = "H"$ ) and E.

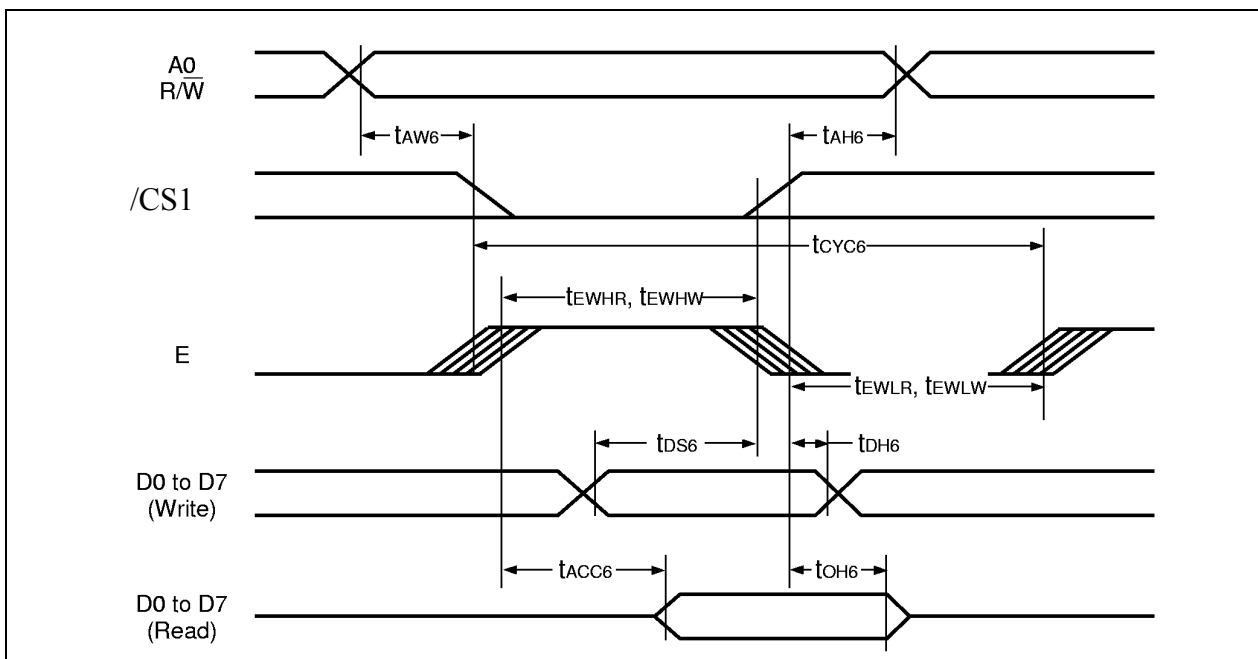


Figure 5: MPU bus read / write timing diagram (68 family MPU)


## 5.3 Instruction Set

Table 9

Command	Command Code											Function	
	A0	RD	WR	D7	D6	D5	D4	D3	D2	D1	D0		
(1) Display ON/OFF	0	1	0	1	0	1	0	1	1	1	0	1	LCD display ON/OFF 0: OFF, 1: ON
(2) Display start line set	0	1	0	0	1	Display start address						Sets the display RAM display start line address	
(3) Page address set	0	1	0	1	0	1	1	Page address				Sets the display RAM page address	
(4) Column address set upper bit	0	1	0	0	0	0	1	Most significant column address				Sets the most significant 4 bits of the display RAM column address.	
Column address set lower bit	0	1	0	0	0	0	0	Least significant column address				Sets the least significant 4 bits of the display RAM column address.	
(5) Status read	0	0	1	Status				0	0	0	0	0	Reads the status data
(6) Display data write	1	1	0	Write data								Writes to the display RAM	
(7) Display data read	1	0	1	Read data								Reads from the display RAM	
(8) ADC select	0	1	0	1	0	1	0	0	0	0	0	1	Sets the display RAM address SEG output correspondence 0: normal, 1: reverse
(9) Display normal/reverse	0	1	0	1	0	1	0	0	1	1	0	1	Sets the LCD display normal/reverse 0: normal, 1: reverse
(10) Display all points ON/OFF	0	1	0	1	0	1	0	0	1	0	0	1	Display all points 0: normal display 1: all points ON
(11) LCD bias set	0	1	0	1	0	1	0	0	0	1	0	1	Sets the LCD drive voltage bias ratio SED1565*** ..... 0: 1/9, 1: 1/7 SED1566*** /SED1568*** /SED1569*** ..... 0: 1/8, 1: 1/6 SED1567** ..... 0: 1/6, 1: 1/5
(12) Read/modify/write	0	1	0	1	1	1	0	0	0	0	0	0	Column address increment At write: +1 At read: 0
(13) End	0	1	0	1	1	1	0	1	1	1	0	0	Clear read/modify/write
(14) Reset	0	1	0	1	1	1	0	0	0	1	0	0	Internal reset
(15) Common output mode select	0	1	0	1	1	0	0	0	*	*	*	*	Select COM output scan direction 0: normal direction, 1: reverse direction
(16) Power control set	0	1	0	0	0	1	0	1	Operating mode			Select internal power supply operating mode	
(17) V <sub>5</sub> voltage regulator internal resistor ratio set	0	1	0	0	0	1	0	0	Resistor ratio			Select internal resistor ratio (R <sub>b</sub> /R <sub>a</sub> ) mode	
(18) Electronic volume mode set	0	1	0	1	0	0	0	0	0	0	0	1	Set the V <sub>5</sub> output voltage electronic volume register
Electronic volume register set	0	1	0	*	*	Electronic volume value							
(19) Static indicator ON/OFF	0	1	0	1	0	1	0	1	1	0	0	1	0: OFF, 1: ON
Static indicator register set	0	1	0	*	*	*	*	*	*	Mode			Set the flashing mode
(20) Power saver													Display OFF and display all points ON compound command
(21) NOP	0	1	0	1	1	1	0	0	0	1	1	1	Command for non-operation
(22) Test	0	1	0	1	1	1	1	*	*	*	*	*	Command for IC test. Do not use this command

(Note) \*: disabled data

## 6. Reference Application Circuit (8080) Example

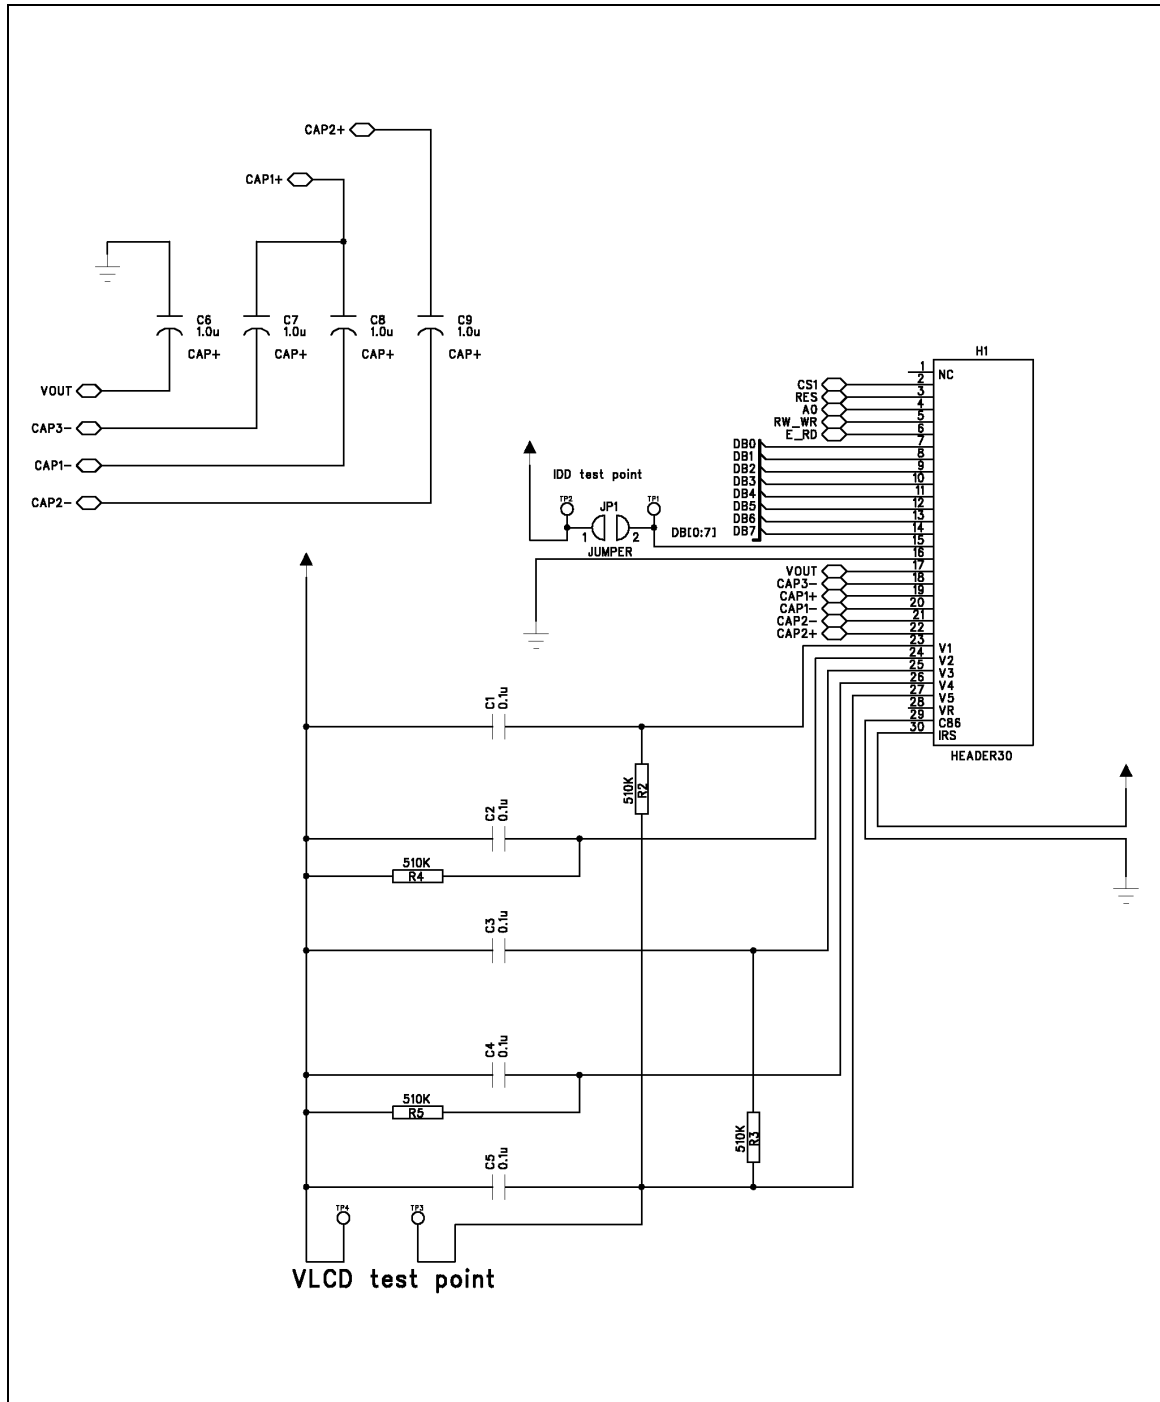



Data Modul Headquarters Munich  
Landsberger-Str. 322  
D-80687 Munich - Germany  
Tel.: +49-89-56017-0



Sales Office Duesseldorf  
Fritz-Vomfelde-Str. 8  
D-40547 Duesseldorf - Germany  
Tel.: +49-211-52709-0



Sales Office Stuttgart  
Friedrich-List-Str. 42  
D-70771 Leinfelden-Echterdingen  
Germany  
Tel.: +49-711-782385-0



Data Modul France, S.A.R.L.  
Bat B - Hall 204  
1-3 Rue des Campanules  
77185 Lognes - France  
Tel.: +33-1-60378100



Data Modul Italia, S.r.l.  
Regus Center Senigallia  
Via Senigallia 18/2  
20161 Milano - Italy  
Tel.: +39-02-64672-509



Data Modul Iberia, S.L.  
c/ Adolfo Pérez Esquivel 3  
Edificio Las Americas III Oficiana 40  
28230 Parque Empresarial  
Madrid Las Rozas - Spain  
Tel.: +34-916 366 458



Data Modul Ltd. / UK  
3 Brindley Place  
Birmingham B 12JB  
United Kingdom  
Tel.: +44-121-698-8641

Data Modul Inc. / USA  
1767-46 Veterans Memorial Highway  
Islandia NY 11749  
USA  
Tel.: +1-877-951-0800